



Beverage Systems

CARD NO.
2

2

Planned Maintenance System Maintenance Requirement Card (MRC)

Equipment:

Everpure Water Filtration System: Prefilter—Quad and Tri-Pack Systems

Precaution:

Essential that this procedure be performed during non-business hours.

Hazard Communication Standard (HCS) – The procedures on this card include the use of chemical products. These chemical products will be highlighted with bold face letters followed by the abbreviation (HCS) in the tools portion of the procedure. See the Hazard Communication Standard (HCS) Manual for the appropriate Material Safety Data Sheet(s) (MSDS).

PICTURES AND ADDITIONAL INFORMATION: Corresponding Chapter of *Equipment Manual*

Semi-Annually

Prefilter Cartridge Changeout

Tools:

- **McD Sanitizer (HCS), Taylor Lube or Haynes Lubri-Film (HCS).**
1. Shut OFF water to system. Turn OFF power to coffee, ice and post mix.
 2. Relieve water pressure by pressing red pressure relief button on top of pre filter head. (Figure 1)

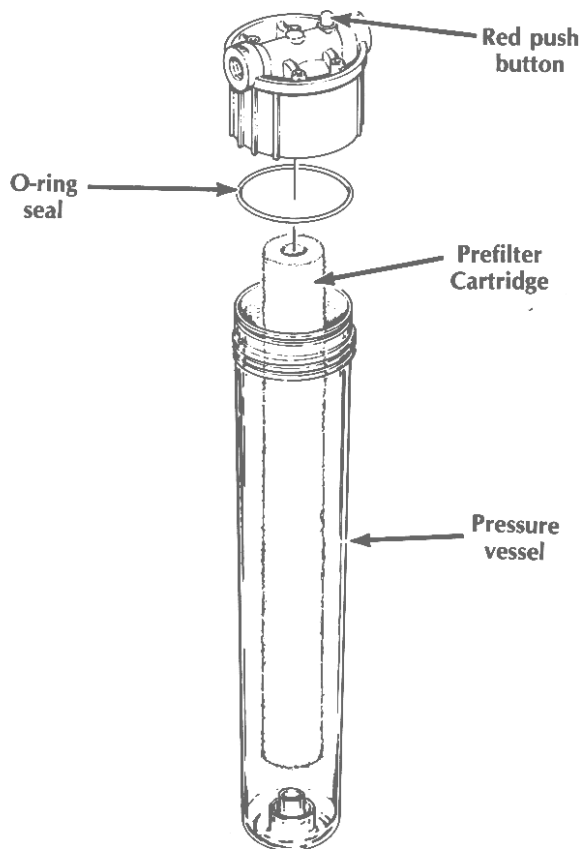


Figure 1

3. Turn the pressure vessel LEFT to remove. Remove used cartridge. Empty water from pressure vessel.
 4. Sanitize the filter head and pressure vessel with sanitizing solution.
Note: 1 packet McD Sanitizer to 2-1/2 gallons (9.5 l) of warm water.
 5. Make sure O-ring seal is lightly lubricated and not nicked or damaged.
 6. Seat replacement cartridge on stub in bottom of the pressure vessel. Make sure bowl stops completely. Firmly screw pressure vessel onto filter head by hand. **HAND TIGHTEN ONLY.**
 7. Turn ON water to system. Turn ON power to coffee, ice and post mix if changing only prefilter.
 8. Check for leaks. If there are leaks see the troubleshooting section of the *Equipment Manual*.
 9. If there are no leaks cartridge changeout is complete.
-