



HD TOWER 1-SIDED IDC175HD



Note: Ice maker, monitors, and hardware sold separately

FEATURES

Space Optimization Design

- 4 Integrated cup tubes, 3 size options
- 4 Integrated lid holders - stores ~120 lids
- Integrated CIP feature for ice hopper cleaning
- Accommodates 800-1,000 lb top mounted ice maker
- Accommodates order monitors and bump bar
- Separate chilled water tap


Operational Efficiency

- 8 Programmable portion control beverage valves
- 4 programmable ice portions plus manual dispense
- 1 portion control ice dispense chutes

Peak Performance

- Integrated 150 lb ice storage container
- Integrated 155 lb water bath cooling system
- Supports ~1,350 finished 475 ml drinks/day (under normal conditions)
- Supports ~4 finished drinks/min for 2 hours to support peak
- Flexible to tie into existing recirc, or pre-chiller to support added capacity, or extreme conditions



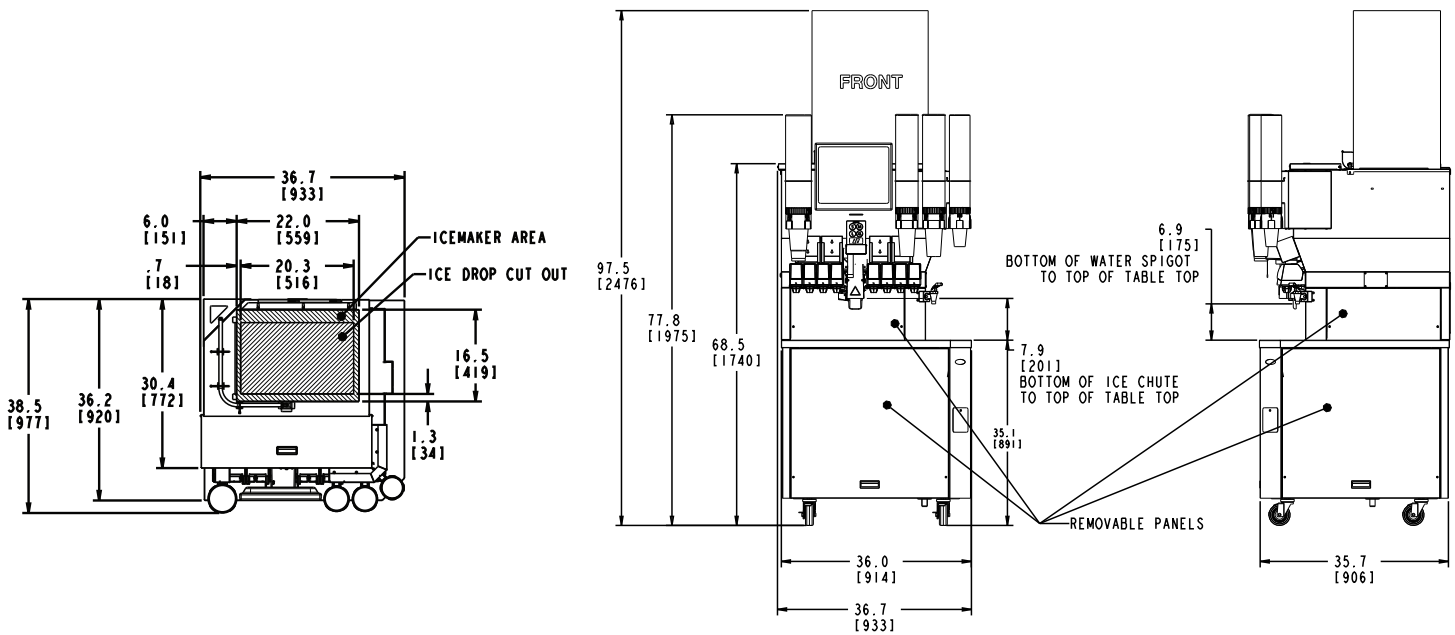

PART NUMBER	DESCRIPTION
621058580	IDC175HD - 8 SFV PC 230/50
621058643	IDC175HD - 8 SFV PC 230/50 Condition C version - with pre-chiller
621058585	IDC175HD - 8 LVV PC 230/50
621058644	IDC175HD - 8 LVV PC 230/50 Condition C version - with pre-chiller

TECHNICAL SPECIFICATIONS

TYPE OF VALVES Portion control
NUMBER OF VALVES 8
PACKED WEIGHT 620 lbs (282 kg)
DIMENSIONS 36"W (91.9 cm) x 36"D
 x 68.2" H (173.2 cm)
 (Add 10" for cup tubes)
ICE STORAGE CAPACITY . . . 150 lb (68 kg)
ICEMAKER ADAPTER
SUPPORTS Manitowoc IB-696 22x14x24
 Manitowoc IB-894 22x14x26.5
 Scotsman EH222-800lb 22x16.5x29
 Scotsman EH222-1000lb 23x16.5x29
DRAINAGE Drain for drip tray (1"
 insulated line supplied)
ELECTRICAL
REQUIREMENT 230 V, 50/60 Hz, 20 Amp

WATER BATH COOLING 155 lbs (70.3 kg)
WATER PRESSURE
REQUIREMENT 100 (689.5 kPa) psi maximum
 static
 40 (275.8 kPa) psi minimum
 dynamic
CONNECTIONS Water: 0.375" (9.5 mm)
 Syrup: 0.375" (9.5mm)
CO2/AIR PRESSURE
REQUIREMENT 100 psi supply from bulk
 75 psi to ice portion
 control cylinders
AGENCY LISTINGS CE NSF

